


Crane Scale HFB

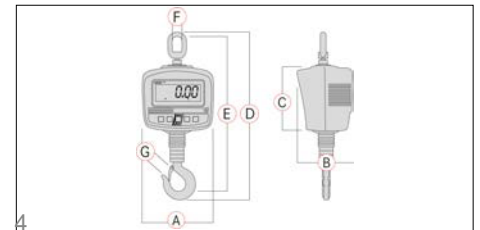

The professional alternative up to 600 kg with rear-facing second display


Features

- With the TÜV certification mark, the scale meets the requirements of the standard EN 13155 (Non-fixed load lifting attachments/Breakage resistance) and EN 61010-1 (Electrical safety)
- Second display on the rear of the balance
- High mobility: thanks to rechargeable battery operation, compact, lightweight construction, it is suitable for the use in several locations (production, warehouse, dispatch department etc.)
- Hold function: When the weighing value remains unchanged the weight indicated on the display is automatically "frozen" until the Hold key is pressed
- Tare: Resets the display to "0" when there is a load on the scale. Now removed or added loads are directly displayed
- Hook with safety catch, revolving
- Shackle and safety catch made of nickel-plated steel
- Radio remote control standard. Range up to 20 m. All functions can be selected (excl. ON/OFF). W×D×H 48×10×95 mm. Batteries included, 2 × 1,5 V AAA

Technical data

- Superior display size: digit height 25 mm, bright backlight for easy reading of weighing results, even in poor lighting conditions
- Dimensions housing W×D×H 162×123×158,5mm
- Rechargeable battery pack internal, operating time up to 40 h without backlight, charging time approx. 14 h
- Precision: 0,2 % of [Max]
- Permissible ambient temperature 0 °C/40 °C

STANDARD



OPTION



| Model | Weighing range [Max] kg | Readout [d] g | Net weight approx. kg | 4 Dimensions | | | | | | | Price excl. of VAT ex works € | Option | |
|-------------|-------------------------|---------------|-----------------------|--------------|------|-------|------|------|------|------|-------------------------------|-------------|---------------------|
| | | | | A mm | B mm | C mm | D mm | E mm | F mm | G mm | | DAkkS | Calibr. Certificate |
| KERN | | | | | | | | | | | | DKD | |
| | | | | | | | | | | | | KERN | € |
| HFB 150K50 | 150 | 50 | 2,2 | 163 | 126 | 158,5 | 390 | 358 | 26 | 25 | 355,- | 963-129H | 105,- |
| HFB 300K100 | 300 | 100 | 2,2 | 163 | 126 | 158,5 | 390 | 358 | 26 | 25 | 385,- | 963-129H | 105,- |
| HFB 600K200 | 600 | 200 | 2,4 | 163 | 126 | 158,5 | 390 | 358 | 26 | 25 | 385,- | 963-130H | 165,- |