



WEIGHING PALLET TRUCK

SERIES X-TRA-B

GENERAL

The immediate advantage of the X-TRA-B weighing pallet truck in the PRECIA-MOLEN range is that weighs pallets or containers during handling.

The X-TRA-B weighing pallet truck is ideal for weighing European pallets. It combines a precise weighing system with a high quality pallet truck. Its functions keypad is so easy that anyone can use it. The X-TRA-B has been designed for intensive use, is resistant to shocks, and is sealed and protected against dust and moisture. Its battery module is very quickly changed and is designed for a life of about 35 hours of use.

PRACTICAL APPLICATIONS

Merchandise checks during reception, shipment or when making inventories are facilitated, and made as simple as possible, creating a considerable productivity gain for your company.

CE CONFORMITY

- » Compliant with European Directive relative to Electromagnetic Compatibility*.
- » Compliant with European Directive relative to Machines
- » Compliant with the European Directive relative to Non Automatic Weighing Instruments (NAWI).

METROLOGICAL APPROVAL

- » CE approval certificate type T2782.

DATA

Manual weighing pallet truck, 4 load cells, Weighing, Totalization.

- » Capacity : 2000 kg
- » Multi-interval graduation:
 - 0 to 200 kg graduation 0,2 kg
 - 200 to 500 kg graduation 0,5 kg
 - 500 to 2000 kg graduation 1,0 kg
- » Maximum error : 0,1% of the weighed weight.
- » Available for commercial transactions.

FUNCTIONS

- » Manual and automatic correction of zero.
- » Gross, Tare and Net functions.
- » Manual and automatic tare.
- » Totalization.
- » Error display.
- » Automatic cut-off after 60 minutes non-use (programmable).

* Meeting the requirements of this Directive depends on a correct installation.

Note: The list of the various applicable European Directives as well as the list of countries with an accreditation can be found in our International Product Guide ref. 99-02-01-1 FT.

WEIGHING PALLET TRUCK


WE MAKE IT EASY.

TECHNICAL DATA

Physical characteristics:

» Dimensions:

- A** - Fork length 1150 mm
 - B** - Fork width 170 mm
 - C** - Minimum height 90 mm
 - D** - Maximum height 210 mm
Lifting travel 120 mm
 - E** - Outside spacing 550 mm
 - F** - Indicator height 650 mm
- » Color RAL 1028 yellow, epoxy paint.
- » Mass 110 kg
- » Steering wheels Rubber
- » Load bearing wheels Polyurethane, simple

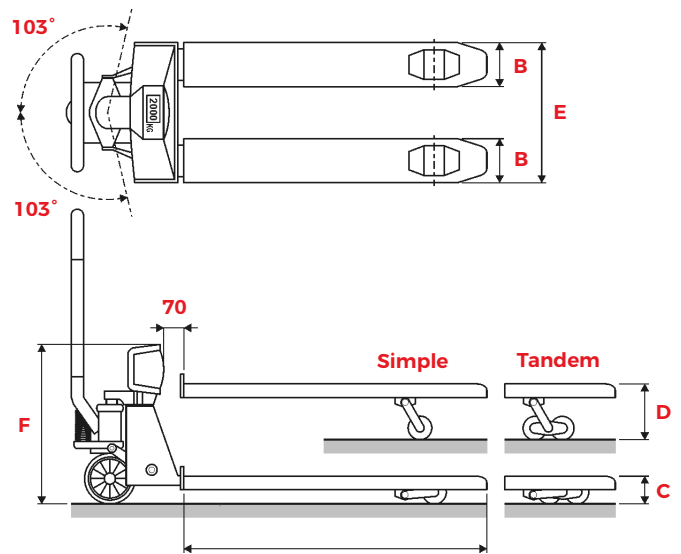

Electrical characteristics

- » Life : up to 35 hours, battery level indication
- » Battery 12 Vdc / 1,2 Ah
- » Battery charger 230 V / 12 Vdc - 300mA

Electrical characteristics

- » Sealing and protection:
 - Load cells and wiring IP 67
 - Indicator IP 65

OPTIONS & ACCESSORIES

- » Integrated printer for printing weighing data.
- » Rotary indicator for reading on 360°.
- » Additional battery module enabling continuous use.
- » Stainless steel frame.
- » Stainless steel forks.
- » Integrated printer for printing weighing data.
- » Rotary indicator for reading on 360°.
- » Additional battery module enabling continuous use.
- » Stainless steel frame.
- » Stainless steel forks.